



RECHERCHES & REALISATIONS REMY S.A.S

RP 3000 TCT

Heavy duty - High performance Compression Frame

3 Columns isostatic compression frame



High stiffness

Deformation
< 0.75mm at
3000 kN

980mm
Ergonomic
height




Hardened and
Teflon coated
Ball seat equipped
with oil bag
Perfect for
footmeter stability
test per
EN 12390-4

Long stroke jack
(100mm) with extra
long guiding
Ultra fine ground
piston
Chromium plated
with special bronze
coating and soft
friction seals



Compression platens Ø 370mm
Hardness > 58 HRC
Equipped with mechanical
centring device

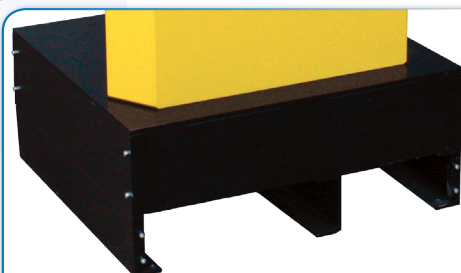

Sturdy pedestal for ergonomic
height (equipped with holes for
forklift and protection door)